


# 60RG Model Motor Generator Set

## 50-60 Hz FREQUENCY CONVERTER

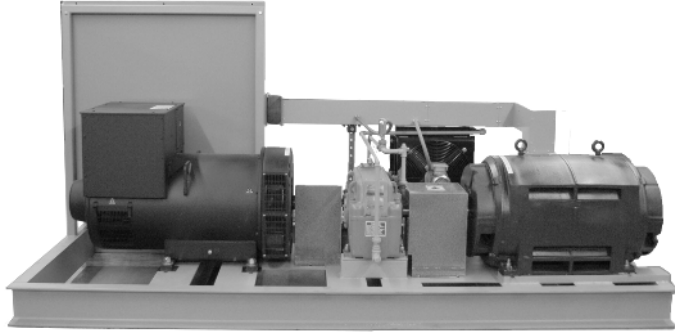

### Features

- Designed to power large loads
- Reliable and durable
- Easy to operate
- Exceptional MTBF
- Minimal maintenance required

### Description

Horlick 60RG Model motor generator sets utilize a 4-pole, 1500 RPM, induction motor to drive a 4-pole, 1800 RPM synchronous generator through a reduction gear drive system. The output frequency is 60 Hz ( $\pm 0.5\%$ ) due to slip of the induction motor. 60RG Model motor generator sets are rated for continuous duty and they provide manufacturers a clean source of 60 Hz power isolated from switching transients, voltage fluctuations and power line noise. They are most commonly utilized by foreign manufacturers who require 60 Hz power to test electrical equipment prior to shipment to the United States. Alternatively, these motor generator sets can also be utilized by foreign manufacturers or military contractors who need to run a large piece of imported 60 Hz equipment brought overseas from the US. 60RG Model motor generator sets are ideal for large capacity installations where the application does not require a precise 60 Hz power source.

Horlick 60RG Model motor generator sets are designed to be installed inside where a 100-105 dBA noise level is acceptable. As an option, if noise level reduction or weather protection is required, 60RG Model motor generator sets can be mounted in a cargo container. Each 60RG Model motor generator set is equipped with a standard free-standing control system. The components in the control system perform the functions necessary to operate, monitor and protect the system.



### Specifications

#### Motor

- Induction, 1500 RPM, 4-pole
- Continuous duty, Class F insulation, open drip-proof
- Selection of 50 Hz, 3-phase input voltages to include: 380V or 416V

#### Generator

- Brushless synchronous, 1800 RPM, 4-pole
- Continuous duty, Class F insulation, open drip-proof
- Selection of 60 Hz output voltages to include: 120/208V or 277/480V, 3-phase
- Rated at 0.8 power factor to insure proper handling of inductive loads

#### Mechanical Construction

- Motor and generator mounted on rigid steel base
- Reduction gear drive system
- Complete OSHA coupling guard
- Forklift or pallet jack provisions

#### Standard Control Systems

Each motor generator set is equipped with a separate free-standing control panel. The standard package includes the following components:

##### Motor Controls

- Motor starter with adjustable overloads
- Start/Stop push buttons with terminal strip for remote start/stop
- Control power transformer with fusing
- Pilot light to indicate "Motor Run"
- Pilot light to indicate "Reduction Gear Low Oil Flow"

##### Generator Controls

- Analog meter package to include voltmeter, ammeter and frequency meter
- Voltmeter and ammeter phase selector switches (3-phase systems)
- Voltage regulator,  $\pm 1\%$  regulation accuracy, with automatic buildup and rheostat for control of regulated voltage
- Output circuit breaker, molded case, to protect generator against short circuit or prolonged overload
- Pilot light to indicate "60 Hz Load On"



**Horlick**<sup>®</sup>  
Control Solutions by SJE

91 Pacella Park Drive, Randolph MA 02368  
Phone 781-963-0090 • Fax 781-986-1540

[www.horlick.com](http://www.horlick.com)



9500534B 01/24  
© 2023 SJE, Inc. All Rights Reserved.  
Horlick is a trademark of SJE, Inc.

# 60RG Model Motor Generator Set

## Performance Characteristics:

- **Voltage regulation:**  $\pm 1\%$  from no-load to full-load at rated power factor
- **Voltage steady state stability:**  $\pm 0.5\%$  from no-load to full-load at rated power factor
- **Voltage adjustment range:**  $\pm 10\%$  in stepless increments of nominal output voltage
- **Frequency regulation:** 60 Hz  $\pm 0.5\%$  output from no-load to full-load
- **Voltage transient:** When a full-load at rated power factor is applied or released, the resultant instantaneous droop or overshoot will not exceed 30% of preset value
- **Voltage recovery time:** After a full-load is applied or released, the output voltage will return to the regulation band within 500 milliseconds
- **Harmonic distortion:** Less than 3% max. total distortion factor and less than 2.5% max. single phase when measured line-to-line
- **Ambient operating conditions:** Temperature at 40°C, relative humidity at 95% (higher temperature rating for outdoor use available upon request)
- **Duty cycle:** Motor generator set and controls are rated for continuous duty

## Motor Generator Options:

- Cargo container for sound reduction or weather protection
- Oversized generator to support motor-starting transients
- Thermal bearing and winding protection
- Input disconnect or circuit breaker
- Input phase protection relay
- Generator reconnection switch to allow selection of multiple output voltages
- Generator over/under voltage protection
- Digital meter package
- Remote meter package with start/stop controls

60RG Model Three Phase Output Ratings

Model	Generator Rating at 0.8 PF		Output Current at 120/208V	Output Current at 277/480V	Motor Rating	Motor Starting Method
60RG-2503	313 KVA	250 KW	868 A	376 A	400 HP	Wye-delta
60RG-3003	375 KVA	300 KW	1042 A	452 A	500 HP	Wye-delta
60RG-4003	500 KVA	400 KW	1390 A	602 A	600 HP	Wye-delta
60RG-5003	625 KVA	500 KW	1737 A	753 A	750 HP	Wye-delta
60RG-6003	750 KVA	600 KW	2084 A	903 A	1000 HP	Wye-delta
60RG-8003	1000 KVA	800 KW	2779 A	1204 A	1250 HP	Wye-delta