


60SC Model Motor Generator Set

50-60 Hz FREQUENCY CONVERTER

Features

- Economical
- Reliable and durable
- Low audible noise
- Easy to operate
- Exceptional MTBF
- Minimal maintenance required

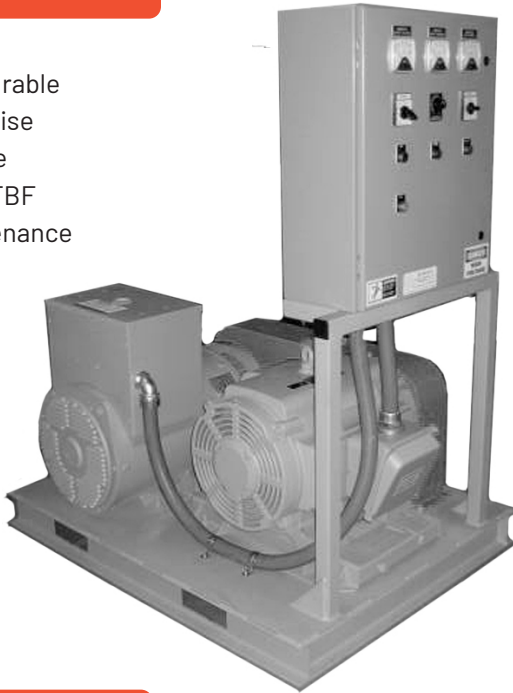

Description

Horlick 60SC Model motor generator sets utilize a 4-pole, 1500 RPM, induction motor to drive a 4-pole, 1800 RPM, synchronous generator through a V-belt drive system. The output frequency is 60 Hz ($\pm 1.5\%$) due to slip of the induction motor. 60SC Model motor generator sets are rated for continuous duty and they provide manufacturers a clean source of 60 Hz power isolated from switching transients, voltage fluctuations and power line noise. They are most commonly utilized by foreign manufacturers who require 60 Hz power to test electrical equipment prior to shipment to the United States. Alternatively, these motor generator sets can also be utilized in overseas applications to power 60 Hz equipment brought over from the United States. 60SC Model motor generator sets are ideal for installations where the application does not require a precise 60 Hz power source.

Horlick 60SC Model motor generator sets are designed to be installed inside where a 75-85 dBA noise level is acceptable. As an option, 60SC Model motor generator sets can be mounted in a weather-resistant enclosure, a sound-reduced enclosure, a cargo container or a trailer. Each 60SC Model motor generator set is equipped with a standard control system that can be unit-mounted, wall-mounted or free standing. The components in the control system perform the functions necessary to operate, monitor and protect the system.

Specifications

Motor

- Induction, 1500 RPM, 4-pole
- Continuous duty, Class F insulation, open drip-proof
- Selection of 50 Hz, 3-phase input voltages to include: 208V, 220V, 380V or 416V

Generator

- Brushless synchronous, 1800 RPM, 4-pole
- Continuous duty, Class F insulation, open drip-proof
- Selection of 60 Hz output voltages to include: 120/240V, 1-phase, 120/208V, 3-phase or 277/480V, 3-phase
- Rated at 0.8 power factor to insure proper handling of inductive loads

Mechanical Construction

- Motor and generator mounted on rigid steel base
- V-belt drive system
- Complete OSHA belt guard
- Forklift or pallet jack provisions

Standard Control Systems

Each motor generator set is equipped with a control panel that can be wall-mounted, floor-standing or unit-mounted. The standard package includes the following components:

Motor Controls

- Motor starter with adjustable overloads
- Start/Stop push buttons with terminal strip for remote start/stop
- Control power transformer with fusing
- Pilot light to indicate "Motor Run"

Generator Controls

- Analog meter package to include voltmeter, ammeter and frequency meter
- Voltmeter and ammeter phase selector switches (3-phase systems)
- Voltage regulator, $\pm 1\%$ regulation accuracy, with automatic buildup and rheostat for control of regulated voltage
- Output circuit breaker, molded case, to protect generator against short circuit or prolonged overload
- Pilot light to indicate "60 Hz Load On"



Horlick[®]
Control Solutions by SJE

91 Pacella Park Drive, Randolph MA 02368
Phone 781-963-0090 • Fax 781-986-1540

www.horlick.com



9500531B 01/24
© 2023 SJE, Inc. All Rights Reserved.
Horlick is a trademark of SJE, Inc.

60SC Model Motor Generator Set

Performance Characteristics:

- **Voltage regulation:** $\pm 1\%$ from no-load to full-load at rated power factor
- **Voltage steady state stability:** $\pm 0.5\%$ from no-load to full-load at rated power factor
- **Voltage adjustment range:** $\pm 10\%$ in stepless increments of nominal output voltage
- **Frequency regulation:** 60 Hz $\pm 1.5\%$ output from no-load to full-load
- **Voltage transient:** When a full-load at rated power factor is applied or released, the resultant instantaneous droop or overshoot will not exceed 30% of preset value
- **Voltage recovery time:** After a full-load is applied or released, the output voltage will return to the regulation band within 500 milliseconds
- **Harmonic distortion:** Less than 3% max. total distortion factor and less than 2.5% max. single phase when measured line-to-line
- **Ambient operating conditions:** Temperature at 40°C, relative humidity at 95% (higher temperature rating for outdoor use available upon request)
- **Duty cycle:** Motor generator set and controls are rated for continuous duty

Motor Generator Options:

- Sound-reduced enclosure
- Weather-resistant, NEMA 3R enclosure
- Casters for portability
- Oversized generator to support motor-starting transients
- Thermal bearing and winding protection
- Unit mounted control system
- Input disconnect or circuit breaker
- Input phase protection relay
- Electronic soft start for drive motor
- Generator reconnection switch to allow selection of multiple output voltages
- Generator over/under voltage protection
- Digital meter package
- Remote meter package with start/stop controls

60SC Model Three Phase Output Ratings

Model	Generator Rating at 0.8 PF		Output Current at 120/208V	Output Current at 277/480V	Motor Rating	Motor Starting Method
	KVA	KW	A	A		
60SC-53	6.25	5	17	8	10 HP	Across the line
60SC-73	9.3	7.5	26	11	15 HP	Across the line
60SC-103	12.5	10	35	15	20 HP	Across the line
60SC-153	18.8	15	52	23	25 HP	Across the line
60SC-203	25	20	69	30	30 HP	Across the line
60SC-253	31.3	25	87	38	40 HP	Across the line
60SC-303	37.5	30	104	45	50 HP	Across the line
60SC-403	50	40	139	60	60 HP	Wye-delta
60SC-503	62.5	50	174	75	75 HP	Wye-delta
60SC-603	75	60	208	90	100 HP	Wye-delta
60SC-803	100	80	278	120	125 HP	Wye-delta
60SC-1003	125	100	347	151	150 HP	Wye-delta
60SC-1253	156	125	434	188	200 HP	Wye-delta
60SC-1503	188	150	521	226	250 HP	Wye-delta
60SC-1753	219	175	608	263	300 HP	Wye-delta
60SC-2003	250	200	695	301	300 HP	Wye-delta
60SC-2503	313	250	868	376	400 HP	Wye-delta

60SC Model Single Phase Output Ratings

Model	Generator Rating at 0.8 PF		Output Current at 120/240V	Motor Rating	Motor Starting Method
	KVA	KW	A		
60SC-51	6.25	5	26	10 HP	Across the line
60SC-71	9.3	7.5	39	15 HP	Across the line
60SC-101	12.5	10	52	20 HP	Across the line
60SC-151	18.8	15	78	25 HP	Across the line
60SC-201	25	20	104	30 HP	Across the line
60SC-251	31.3	25	130	40 HP	Across the line
60SC-301	37.5	30	156	50 HP	Across the line
60SC-401	50	40	208	60 HP	Wye-delta
60SC-501	62.5	50	260	75 HP	Wye-delta
60SC-601	75	60	313	100 HP	Wye-delta
60SC-801	100	80	417	125 HP	Wye-delta
60SC-1001	125	100	521	150 HP	Wye-delta