


60RC Model Motor Generator Set

60-60 Hz LINE CONDITIONER

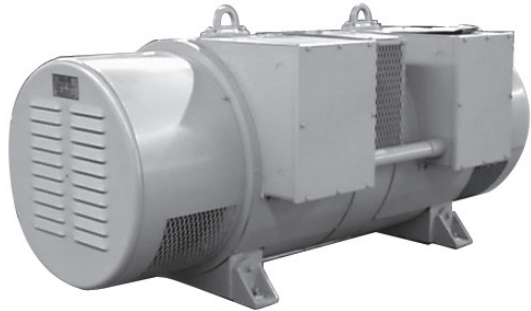

Features

- Precise 60 Hz output frequency
- Common frame design
- Absolute load isolation
- Easy to operate
- Exceptional MTBF
- Minimal maintenance required

Description

Horlick 60RC Model motor generator sets consist of a 4-pole, synchronous motor and a 4-pole, synchronous generator mounted on a common shaft. These units run at 1800 RPM and deliver an output frequency of precisely 60 Hz from no-load to full-load. 60RC Model motor generator sets provide a clean source of 60 Hz power that is isolated from the distribution system. These motor generators are rated for continuous duty and they provide manufacturers, building operations managers and plant engineers with a 60 Hz power source free of switching transients, voltage fluctuations and power line noise. 60RC Model line conditioners isolate and protect computers, instrumentation and other sensitive electronic equipment from electrical faults that may cause erratic performance or failure. They are ideal in applications where a pure sine wave, absolute load isolation and continuous run time are required.

Horlick 60RC Model motor generator sets are designed to be installed inside where an 80-85 dBA noise level is acceptable. As an option, 60RC Model motor generator sets can be mounted in a weather-resistant enclosure, a sound-reduced enclosure, a cargo container or a trailer. Each 60RC Model motor generator set is equipped with a standard control system that is either wall-mounted or free standing. The components in the control system perform the functions necessary to operate, monitor and protect the system.



Specifications

Motor

- Brushless synchronous, 1800 RPM, 4-pole
- Continuous duty, Class F insulation, open drip-proof
- Selection of 60 Hz, 3-phase input voltages to include: 208V, 230V or 460V

Generator

- Brushless synchronous, 1800 RPM, 4-pole
- Continuous duty, Class F insulation, open drip-proof
- Selection of 60 Hz output voltages to include: 120/208V or 277/480V, 3-phase
- Rated at 0.8 power factor to insure proper handling of inductive loads

Mechanical Construction

- Motor and generator mounted on common shaft
- Reinforced steel frame
- Precision machined and dynamically balanced rotor

Standard Control Systems

Each motor generator set is equipped with a separate wall-mounted or floor-standing control panel. The standard package includes the following components:

Motor Controls

- Motor starter with adjustable overload
- Start/Stop push buttons with terminal strip for remote start/stop
- Control power transformer with fusing
- Variable transformer for power factor control, with protective relay for motor out-of-step and field failure protection
- Analog meter package to include ammeter and run time meter
- Pilot lights to indicate "Motor Run" and "60 Hz Line Energized"

Generator Controls

- Analog meter package to include voltmeter, ammeter and frequency meter
- Voltmeter and ammeter phase selector switches (3-phase systems)
- Voltage regulator, $\pm 1\%$ regulation accuracy, with automatic buildup and rheostat for control of regulated voltage
- Output circuit breaker, molded case, to protect generator against short circuit or prolonged overload
- Pilot light to indicate "60 Hz Load On"
- Over voltage protection package to include output circuit breaker shunt trip



Horlick[®]
Control Solutions by SJE

91 Pacella Park Drive, Randolph MA 02368
Phone 781-963-0090 • Fax 781-986-1540

www.horlick.com



9500539B 01/24
© 2023 SJE, Inc. All Rights Reserved.
Horlick is a trademark of SJE, Inc.

60RC Model Motor Generator Set

Performance Characteristics:

- **Voltage regulation:** $\pm 1\%$ from no-load to full-load at rated power factor
- **Voltage steady state stability:** $\pm 0.5\%$ from no-load to full-load at rated power factor
- **Voltage adjustment range:** $\pm 10\%$ in stepless increments of nominal output voltage
- **Frequency regulation:** Precise 60 Hz output from no-load to full-load
- **Voltage transient:** When a full-load at rated power factor is applied or released, the resultant instantaneous droop or overshoot will not exceed 30% of preset value
- **Voltage recovery time:** After a full-load is applied or released, the output voltage will return to the regulation band within 500 milliseconds
- **Harmonic distortion:** Less than 3% max. total distortion factor and less than 2.5% max. single phase when measured line-to-line
- **Ambient operating conditions:** Temperature at 40°C, relative humidity at 95% (higher temperature rating for outdoor use available upon request)
- **Duty cycle:** Motor generator set and controls are rated for continuous duty

Motor Generator Options:

- Weather-resistant, NEMA 3R enclosure
- Thermal bearing and winding protection
- Input disconnect or circuit breaker
- Input phase protection relay
- Automatic restart circuit
- Digital meter package
- Remote meter package with start/stop controls

60RC Model Three Phase Output Ratings

Model	Generator Rating at 0.8 PF		Output Current at 120/208V	Output Current at 277/480V	Motor Rating	Motor Starting Method
	KVA	KW				
60RC-203	25	20	69	30	30 HP	Wye-delta
60RC-253	31.3	25	87	45	40 HP	Wye-delta
60RC-303	37.5	30	104	57	50 HP	Wye-delta
60RC-403	50	40	139	60	60 HP	Wye-delta
60RC-503	62.5	50	174	75	75 HP	Wye-delta
60RC-603	75	60	208	90	100 HP	Wye-delta
60RC-753	93.8	75	261	113	125 HP	Wye-delta
60RC-1003	125	100	347	151	150 HP	Wye-delta
60RC-1253	156	125	434	188	200 HP	Wye-delta
60RC-1503	188	150	521	226	250 HP	Wye-delta
60RC-1753	219	175	608	263	300 HP	Wye-delta
60RC-2003	250	200	695	301	300 HP	Wye-delta
60RC-2503	313	250	868	376	400 HP	Wye-delta
60RC-3003	375	300	1042	452	500 HP	Wye-delta
60RC-3503	438	350	1216	527	550 HP	Wye-delta
60RC-4003	500	400	1390	602	600 HP	Wye-delta
60RC-4503	563	450	1563	677	700 HP	Wye-delta
60RC-5003	625	500	1737	753	750 HP	Wye-delta
60RC-5503	688	550	1911	828	850 HP	Wye-delta
60RC-6003	750	600	2084	903	1000 HP	Wye-delta
60RC-6503	813	650	2258	978	1000 HP	Wye-delta
60RC-7003	875	700	2432	1054	1100 HP	Wye-delta
60RC-7503	938	750	2605	1129	1250 HP	Wye-delta
60RC-8003	1000	800	2779	1204	1250 HP	Wye-delta