


BVL Model Motor Generator Set

VARIABLE FREQUENCY OUTPUT

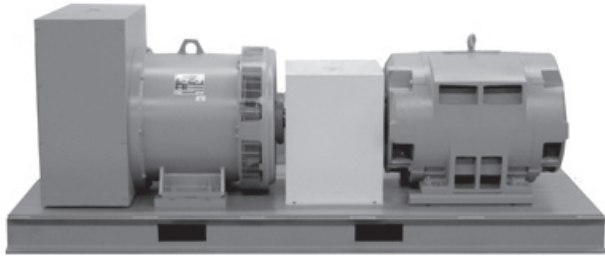

Features

- Customized to your specific application
- Reliable and durable
- Variable frequency and voltage
- Easy to operate
- Exceptional MTBF
- Minimal maintenance required

Description

Horlick BVL Model motor generator sets consist of a 4-pole, 1800 RPM, induction motor and a 4-pole, 1800 RPM, synchronous generator mounted on a rigid steel base and connected via a flexible coupling. The motor speed is controlled by a variable frequency drive. In standard applications, the motor speed can be adjusted from 1350-1950 RPM creating an output frequency on the generator that varies from 45-65 Hz. BVL Model motor generator sets are rated for continuous duty and they provide manufacturers a clean source of power that can be adjusted over a wide frequency and voltage range. They are most commonly utilized by manufacturers who want to utilize a fixed frequency of either 50 Hz or 60 Hz in their test stands. Alternatively, they may be used by manufacturers who are interested in testing their equipment over a frequency and voltage range that can be varied. BVL Model motor generator sets are ideal for custom installations where flexibility and functionality are required.

Horlick BVL Model motor generator sets are designed to be installed inside. Their noise level can vary from 75-95 dBA depending on the capacity of the system. As an option, BVL Model motor generator sets can be mounted in a weather-resistant enclosure, a sound-reduced enclosure, a cargo container or a trailer. Each BVL Model motor generator set is equipped with a standard control system that can be unit-mounted, wall-mounted or free standing. The components in the control system perform the functions necessary to operate, monitor and protect the system.



Specifications

Motor

- Induction, 1800 RPM base speed, 4-pole
- Continuous duty, Class F insulation, open drip-proof
- Selection of 3-phase input voltages to include: 208V, 230V, 380V, 460V or 575V

Generator

- Brushless synchronous, 1800 RPM, 4-pole
- Continuous duty, Class F insulation, open drip-proof
- Selection of output voltages to include: 120/240V, 1-phase or 120/208V, 220/380V or 277/480V, 3-phase
- Rated at 0.8 power factor to insure proper handling of inductive loads

Mechanical Construction

- Motor and generator mounted on rigid steel base
- Flexible coupling drive system
- Complete OSHA coupling guard
- Forklift or pallet jack provisions

Standard Control Systems

Each motor generator set is equipped with a separate wall-mounted or floor-standing control panel. The standard package includes the following components:

Motor Controls

- Disconnect, non-fused with thru door handle
- Fuse block and fuses for motor short circuit protection
- Variable frequency drive
- Intermittent braking resistor
- Start/Stop push buttons with terminal strip for remote start/stop
- Control power transformer with fusing
- Pilot light to indicate "Motor Run"
- Potentiometer for motor generator speed control

Generator Controls

- Digital meter to include voltage, current and frequency indication
- Voltage regulator, $\pm 1\%$ regulation accuracy, with automatic buildup and rheostat for control of regulated voltage
- Output circuit breaker, molded case, to protect generator against short circuit or prolonged overload
- Pilot light to indicate "Output Circuit Breaker Closed"



Horlick[®]
Control Solutions by SJE

91 Pacella Park Drive, Randolph MA 02368
Phone 781-963-0090 • Fax 781-986-1540

www.horlick.com



9500540B 01/24
© 2023 SJE, Inc. All Rights Reserved.
Horlick is a trademark of SJE, Inc.

BVL Model Motor Generator Set

Performance Characteristics:

- **Voltage regulation:** $\pm 1\%$ from no-load to full-load at rated power factor
- **Voltage steady state stability:** $\pm 0.5\%$ from no-load to full-load at rated power factor
- **Voltage adjustment range:** $\pm 10\%$ in stepless increments of nominal output voltage
- **Frequency regulation:** Precise 50 Hz output from no-load to full-load
- **Voltage transient:** When a full-load at rated power factor is applied or released, the resultant instantaneous droop or overshoot will not exceed 30% of preset value
- **Voltage recovery time:** After a full-load is applied or released, the output voltage will return to the regulation band within 500 milliseconds
- **Harmonic distortion:** Less than 3% max. total distortion factor and less than 2.5% max. single phase when measured line-to-line
- **Ambient operating conditions:** Temperature at 40°C, relative humidity at 95% (higher temperature rating for outdoor use available upon request)
- **Duty cycle:** Motor generator set and controls are rated for continuous duty

Motor Generator Options:

- Sound-reduced enclosure
- Weather-resistant, NEMA 3R enclosure
- Casters for portability
- Oversized generator to support motor-starting transients
- Thermal bearing and winding protection
- Unit mounted control system
- Generator reconnection switch to allow selection of multiple output voltages
- Generator over/under voltage protection
- Remote meter package with start/stop controls

Note: BVL Model motor generator sets are also available with single phase outputs. Contact us for more information.

BVL Model Three Phase Output Ratings

Model	Generator Rating at 60 Hz		Generator Rating at 50 Hz		Motor Rating	Motor Starting Method
	KVA	KW	KVA	KW		
BVL-53	6.25	5	5	4	10 HP	Variable Frequency Drive
BVL-73	9.3	7.5	6.25	5	15 HP	Variable Frequency Drive
BVL-103	12.5	10	9.3	7.5	20 HP	Variable Frequency Drive
BVL-153	18.8	15	12.5	10	25 HP	Variable Frequency Drive
BVL-203	25	20	18.8	15	30 HP	Variable Frequency Drive
BVL-253	31.3	25	25	20	40 HP	Variable Frequency Drive
BVL-303	37.5	30	31.3	25	50 HP	Variable Frequency Drive
BVL-403	50	40	37.5	30	60 HP	Variable Frequency Drive
BVL-503	62.5	50	50	40	75 HP	Variable Frequency Drive
BVL-603	75	60	62.5	50	100 HP	Variable Frequency Drive
BVL-803	100	80	75	60	125 HP	Variable Frequency Drive
BVL-1003	125	100	100	80	150 HP	Variable Frequency Drive
BVL-1253	156	125	125	100	200 HP	Variable Frequency Drive
BVL-1503	188	150	156	125	250 HP	Variable Frequency Drive
BVL-1753	219	175	188	150	300 HP	Variable Frequency Drive
BVL-2003	250	200	200	160	300 HP	Variable Frequency Drive
BVL-2503	313	250	250	200	400 HP	Variable Frequency Drive
BVL-3003	375	300	313	250	500 HP	Variable Frequency Drive
BVL-4003	500	400	375	300	600 HP	Variable Frequency Drive
BVL-5003	625	500	500	400	750 HP	Variable Frequency Drive
BVL-6003	750	600	625	500	1000 HP	Variable Frequency Drive